



Note:
For additional
information
see Section C-C
on Sheet no. 5 of 13.

This portion of the
backwall shall not
be placed until the
adjacent deck
placement is
complete.

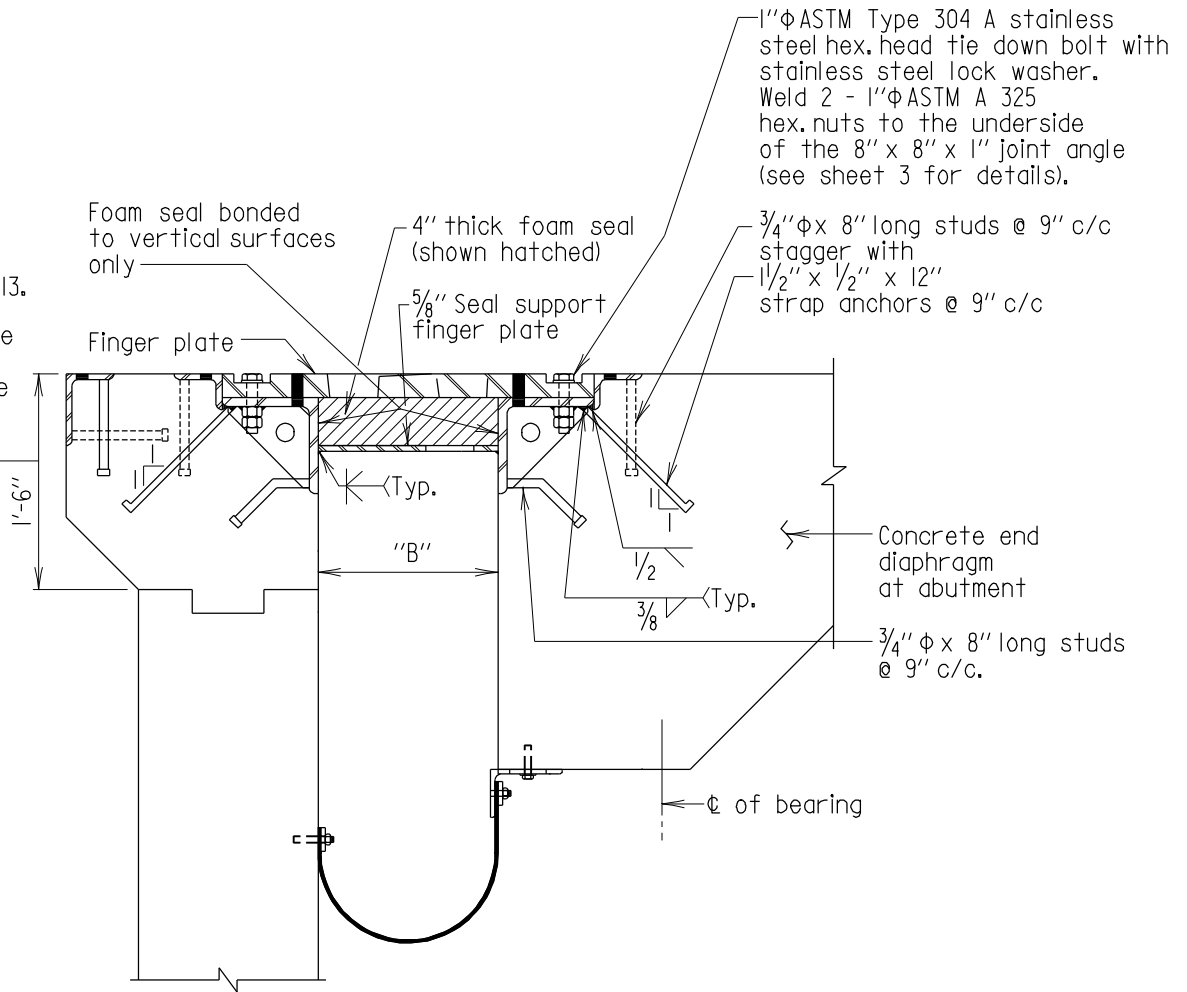

SECTION B-B TYPICAL SECTION BETWEEN STRINGERS

Scale: $\frac{3}{4}" = 1'-0"$

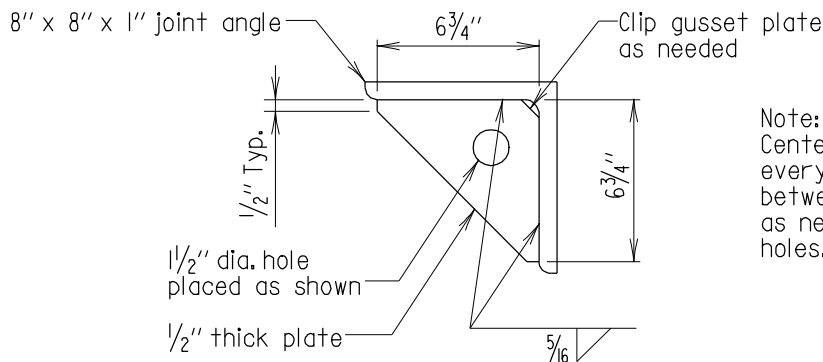

Note:
Center gusset plate between
every other tie down bolt
between girders. Move plate
as necessary to clear vent
holes.

GUSSET PLATE DETAILS

Scale: $1\frac{1}{2}" = 1'-0"$

Notes:

1. For finger plate thickness and dimension "B", see Sht. No. 13 of 13.
2. For details of drainage trough, see Standard No. BR-SS(7.02)-79-64.
3. For details not shown see Sheet. no. 3 of 13.

APPROVAL	
<i>L.S. Friedman</i>	DIRECTOR
OFFICE OF BRIDGE DEVEL.	
DATE: 11/17/97	
REVISIONS	
SHA	FHWA
1-22-01	
8-19-04	
10-17-05	

FHWA APPROVAL
DATE:

STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION
OFFICE OF BRIDGE DEVELOPMENT

FINGER JOINT DETAILS (34" F-SHAPE PARAPET)
FOR BRIDGES WITH STEEL STRINGERS
WITH SKEW ANGLES BETWEEN 50° AND 90°

STANDARD NO. BR-SS(7.18)-97-321A

SHEET 4 OF 13